

EyeM4/Logger1000 Local Firmware Update Procedure via a Laptop

Disclaimer

The material in this document has been prepared by Sungrow Australia Group Pty. Ltd. ABN 76 168 258 679 and is intended as a guideline to assist solar installers for troubleshooting. It is not a statement or advice on any of the Electrical or Solar Industry standards or guidelines. Please observe all OH&S regulations when working on Sungrow equipment.

Please note: a laptop should be used to update the EyeM4 (WiFi/4G)/Logger1000 firmware

How to update the EyeM4 (WiFi/4G)/Logger1000 via a Laptop

1. Using the laptop to connect the EyeM4 (WiFi/4G)/Logger1000 **SG-WiFi signal**
2. Then, open the web browser, enter the **IP address 11.11.11.1**
3. Click Login and enter the password **pw1111**

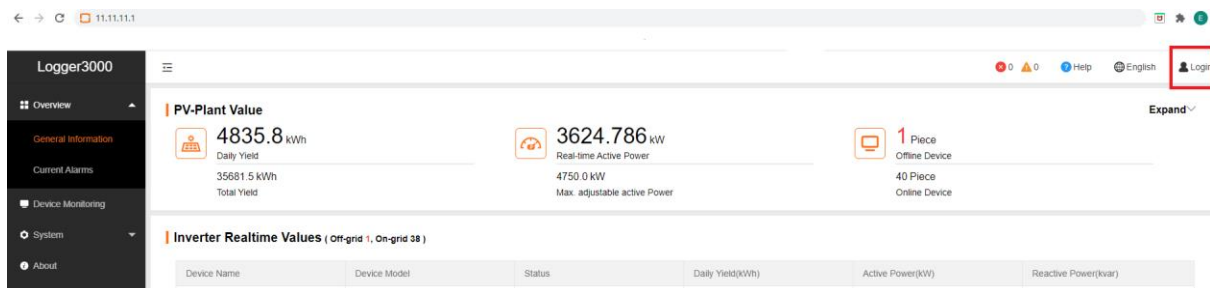


Figure 1 Local access the EyeM4 and Login

It will pop up the following option. Select the **System Maintenance**.

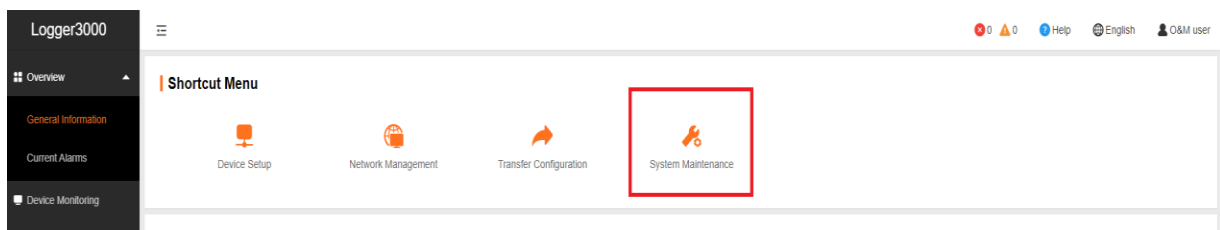


Figure 2 Select the System Maintenance

Then select the **System Update**

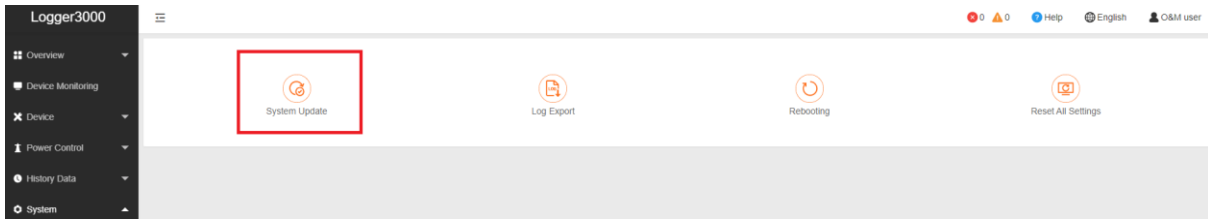


Figure 3 Select System Update

It will pop up a window to let you add the firmware file, you can select the corresponding file and click to update.

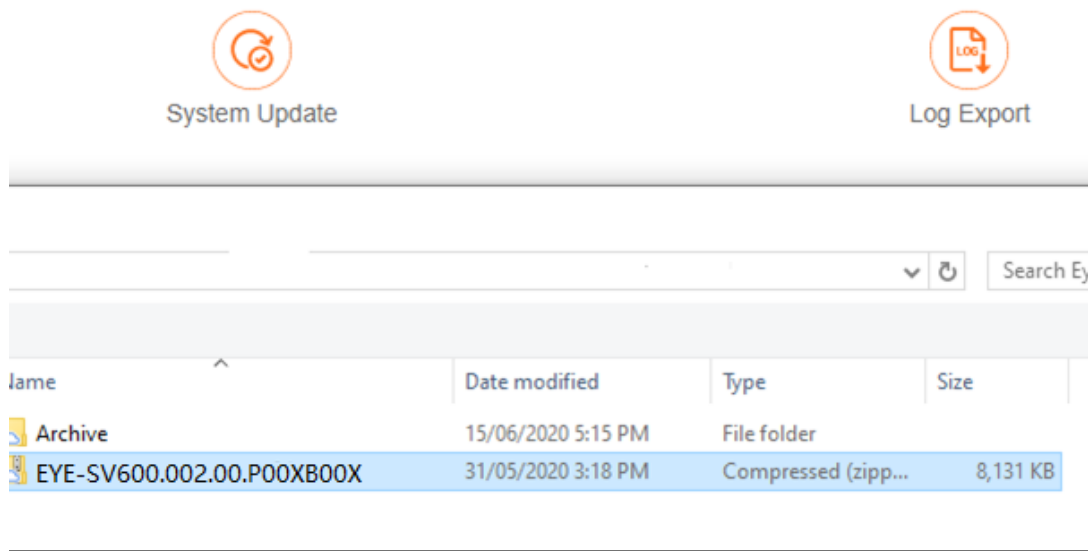


Figure 4 Select the file and Update

It may take a few minutes to update firmware, please wait while it is upgrading.

To receive the latest EyeM4 (WiFi/4G)/Logger1000 firmware, please contact Sungrow Service Team.

If you cannot conduct Local Firmware Update, please take photos with issues and contact Sungrow Service Department on 1800 786 476 or email to service@sungrowpower.com.au.