

10.2 LCD Menu Structure

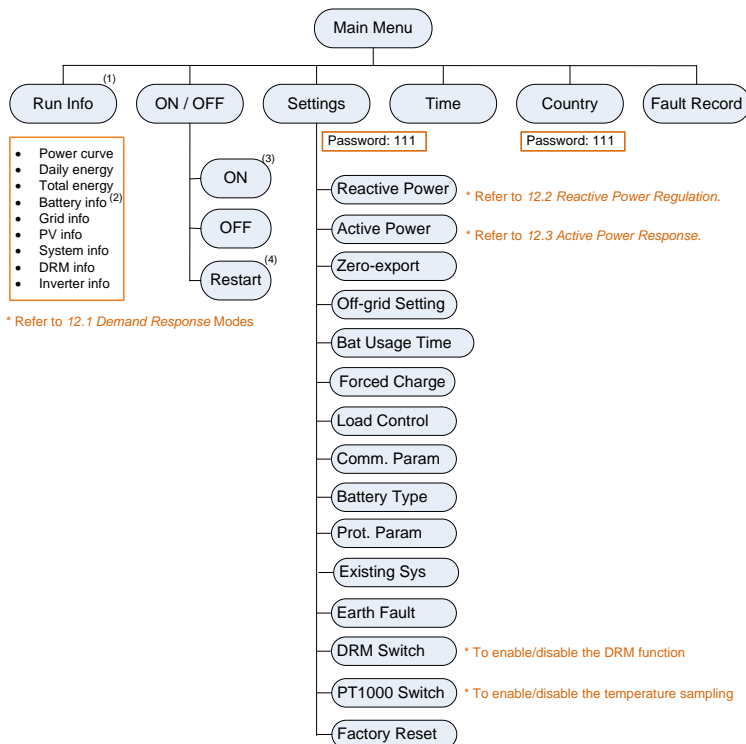


Fig. 10-1 LCD Menu Tree

- The power value indicated represents the average value during the time interval. The energy yields displayed are indicative only. For the actual yields, please refer to the electric energy meter.
- The value of battery SOH will be displayed as “--” for Pylon US2000A and GCL battery that do not have this parameter.
- The DRM0 state will prohibit the “ON”.
- The “Restart” option will appear only if an unrecoverable fault occurs.



The demand response mode (DRM), reactive power settings about Q_t , $Q(p)$, $Q(u)$, and power derating settings are valid only for Australia.